



Your comfortable space solution


- → Ideal as a long-term or temporary space solution
- → High-quality specifications
- → Acoustically optimised interior
- → Optimal thermal insulation
- → Modern, attractive appearance



→ Solid wood interior staircase



→ Bright rooms through fixed glazing

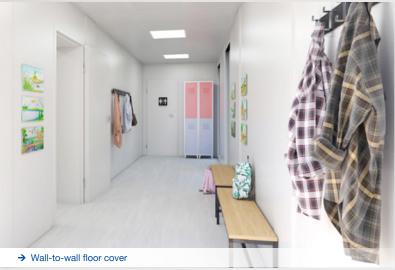




→ Interior with suspended ceiling and LED lighting as standard

High-quality specifications

- → Many design options (e.g. venetian blinds, aluminium roller shutters, internal partitions, internal staircases, full and partial glazing, etc.)
- → Different floor covers (e.g. Eternal Wood 2 mm)
- → Suspended ceiling and integrated LED lighting as standard
- → Fire protection (R)El30 as standard
- → Various additional equipment e.g. motion detector, convector heater, air conditioning, etc.
- → High-quality concealed sanitary equipment

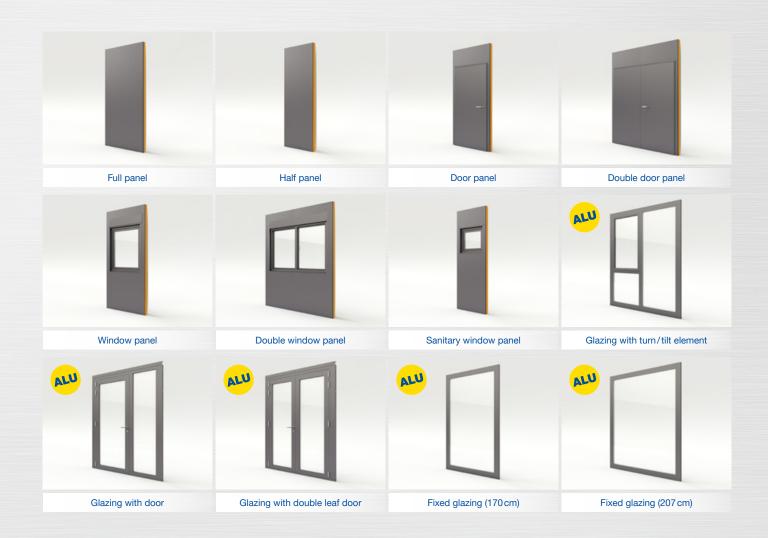



Attractive design

- → Individual adaptations through the modular design
- → Thermally separated external door (U-value: 0.87)
- → High-quality door variants available (e.g. Aluportal with fixed glazing)
- → Window with 5-chamber plastic profile with aluminium clip in exterior colour (optional)
- → Fixed glazing with thermally separated aluminium profiles
- → Insulated glazing (Ug value: 0.7)
- → High-quality shading options (external Venetian blinds, aluminium roller shutters)





Technical details*

Insulation

Roof: 200 mm ** PU + MW, U-value up to 0,15 W/m²K Wall: up to 190 mm ** PIR+MW, U-value up to 0,17 W/m²K

Floor: 160 mm ** PIR + MW, U-value up to 0,17 W/m²K

Increased payloads

Floor payload: up to 400 kg/m² Snow load: up to 250 kg/m² Wind load: up to 100 km/h

Available sizes, dimensions and weights

TYPE	EXTERIOR (mm)			INTERIOR (mm)			MEIGHT (ta)
	Length	Width	Height	Length	Width	Height	WEIGHT (kg)
10'	2.989	2.435	3.100	2.669	2.205	2.550	1.500
16'	4.880	2.435	3.100	4.560	2.205	2.550	2.400
20'	6.055	2.435	3.100	5.735	2.205	2.550	2.900
24'	7.325	2.435	3.100	7.005	2.205	2.550	3.500
20' staircase cabin	6.055	2.989	3.100	5.815	2.749	2.550	3.500

^{*}Further information according to the technical description CONTAINEX PLUS Line. **Total thickness of thermal insulation

Contact us

Phone: +43 2236 601-0

E-mail: ctx@containex.com



www.containex.com